


5100 Series


Dimensions (inches)

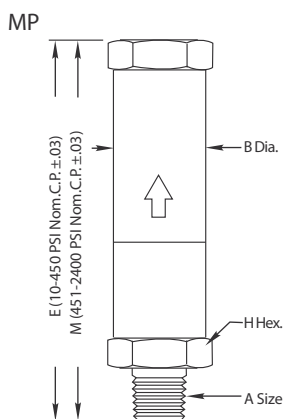

5100 Series, Inline

Prod. No.	A	E	M	B Dia. H Hex
-1MP	1/8"	2.89	3.49*	0.81*
-2MP	1/4"	3.34	4.24	1.00
-3MP	3/8"	3.36	4.26	1.00
-4MP	1/2"	4.15	5.05	1.25
-6MP	3/4"	5.61	7.11	1.50
-8MP	1"	5.79	7.29*	1.50
-10MP	1 1/4"	7.46	10.22	2.00



* 1/8" size: for cracking pressure 1201–2400 psig, 'M' is 3.95, 'B' and 'H' are 1.00
 1" size: for cracking pressure 1201–2400 psig, 'M' is 7.32
 1 1/4" size: not available above 1200 psig

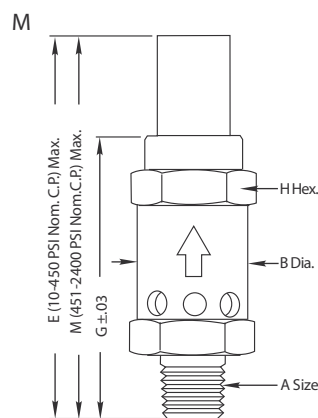

5100 Series, Popoff

Prod. No.	A	E	M	G	B Dia. H Hex
-1M	1/8"	2.56	3.16*	2.39*	0.81*
-2M	1/4"	2.87	3.77	2.65	1.00
-3M	3/8"	2.89	3.79	2.74	1.00
-4M	1/2"	3.59	4.49	3.27	1.25
-6M	3/4"	5.00	6.50	4.16	1.50
-8M	1"	5.18	6.68	4.34	1.50
-10M	1 1/4"	6.70	8.65	4.96	2.00

* 1/8" size: for cracking pressure 1201–2400 psig, 'M' is 3.58, 'G' is 2.48, 'B' and 'H' are 1.00
 1 1/4" size: not available above 1200 psig

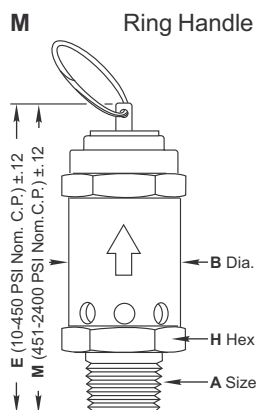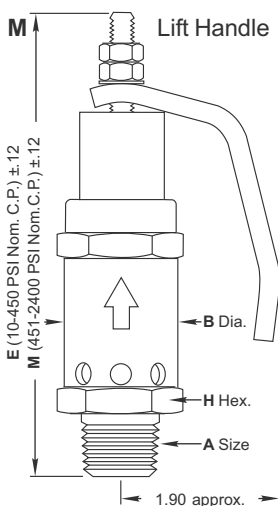

M5100 Series, Popoff with Manual Override

Prod. No.*	A	E	M	B Dia. H Hex
-1M	1/8"	2.84	3.45**	0.81**
-2M	1/4"	3.16	4.06	1.00
-3M	3/8"	3.19	4.09	1.00
-4M	1/2"	3.86	5.51	1.25
-6M	3/4"	5.41	7.54	1.50
-8M	1"	5.59	7.72	1.50
-10M	1 1/4"	6.95	10.42	2.00

* Ring handle is supplied for 1M, 2M, and 3M. For larger sizes, ring handle only supplied for cracking pressure up to 450 psi.

** 1/8" size: for cracking pressure 1201–2400 psig, 'M' is 3.84, 'B' and 'H' are 1.00
 1 1/4" size: not available above 1200 psig